




RAMSYS™

# NIM 201K™

## Neutron Irradiation Dose Rate Monitor

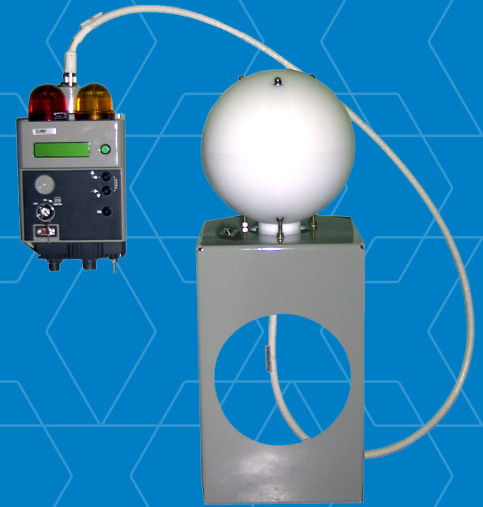

Monitoring neutron equivalent dose rate in real time.

### DESCRIPTION

The NIM 201K monitor forms part of the RAMSYS product line. It has been developed to monitor the neutron equivalent dose rate in real time.

It provides operational dose rate in units of H\*(10) derived from neutron fluence according to ICRU 57 recommendations. The helium-3 proportional counter (cylindrical tube) placed inside a polyethylene sphere detects thermal and fast neutrons. Its large energy range, associated with modular design makes it efficient, reliable and very sensitive. It is used effectively in nuclear reactors, subcritical stacks, neutron generators, irradiators and in accelerator facilities.

### FEATURES

- ✓ Detector for indoor and outdoor applications
- ✓ H\*(10) measurement
- ✓ Available with or without display and local signaling
- ✓ Wide and high neutron energy range (2.5 10<sup>-8</sup> to 16 MeV)
- ✓ Compact and reliable

# NIM 201K™ NEUTRON IRRADIATION DOSE RATE MONITOR

## PHYSICAL CHARACTERISTICS

- Radiation detected: neutron
- Detector: He3 proportional counter
- Energy range: 2.5 10<sup>-8</sup> (thermal) to 16 MeV
- Typical measurement range (according to IEC61322): 10<sup>-6</sup> to 0.1 Sv/h (10<sup>-4</sup> to 10 rem/h)
- Measurement capability: 10<sup>-7</sup> to 0.3 Sv/h (10<sup>-5</sup> to 30 rem/h)

## ENVIRONMENTAL CHARACTERISTICS

- Nomal temperature: +5 °C to +40 °C (+41 °F to +104 °F)
- Temperature limit:
  - Processing unit: -5 °C to +55 °C (+23 °F to +131 °F)
  - Detector: -20 °C to +70 °C (-4 °F to +158 °F)
- MTBF:
  - Processing unit: > 50 000 hours
- TID:
  - Processing unit: 100 Gy (10<sup>+4</sup> rad)
  - Detector: 5 10<sup>+3</sup> Gy (5 10<sup>+5</sup> rad)
- Protection index: IP65 and IK07

## MECHANICAL CHARACTERISTICS

- Dimensions:
  - Processing unit: 390 mm x 196 mm x 187 mm (15.3 in x 7.7 in x 7.3 in)
  - Detector sub-assembly: 817 mm x 312 mm x 310 mm (32.2 in x 12.3 in x 12.2 in)
- Weight:
  - Processing unit: 8.5 kg (18.7 lb)
  - Detector sub-assembly: ~ 31 kg (~ 68.3 lb)
- Color: gray RAL 7030 (decontaminable paint)

## ELECTRICAL CHARACTERISTICS

- Power supply: 230 Vac – 50 Hz or 120 Vac – 60 Hz
- Data link outputs: one RS232 (LPDU only) and two isolated RS485
- Alarm relays: three SPDT relays
- I/O: two isolated analog outputs and one isolated analog input (0/4-20 mA)

## SIGNALING (APPLICABLE TO LPDU ONLY)

- Alphanumeric display: measurement, status...
- Sound alarm: buzzer 90 dBA at 1 meter
- Visual alarm: three lights (red, yellow, green)

## REFERENCE STANDARDS

- Nuclear: IEC61322, IEC61005
- EMC: 2014/30/EU and 2014/35/EU, IEC61000-6-2 and IEC61000-6-4

## VERSIONS

- 230 Vac or 120 Vac
- Local processing and display unit (LPDU) or local processing unit (LPU)
- With or without RS485 junction box
- Detector cable length: 2 m (6.56 ft), 5 m (16.4 ft) or 10 m (32.8 ft)
- Junction box cable length: 2 m (5.65 ft), 5 m (16.4 ft) or 10 m (32.8 ft)

## ACCESSORIES

- Calibration source
- Software: MASS2™, RAMVISION™, SIMS2™ applications...
- USB converters



**MIRION**  
TECHNOLOGIES

Copyright © 2023 Mirion Technologies, Inc. or its affiliates. All rights reserved. Mirion, the Mirion logo, and other trade names of Mirion products listed here in are registered trademarks or trademarks of Mirion Technologies, Inc. or its affiliates in the United States and other countries. Third party trademarks mentioned are the property of their respective owners.